




CHD series
Gantry Double Crank
Precision
High-speed Press

JAPAN JIS
Super Grade
Accuracy

Function Features

- Integral high rigidity cast steel through internal stress relief to ensure long-term high precision.
- Six-round guide pole apply with lubrication system to minimize the kinetic force of friction and heat deformation.
- Apply high pressure oil on crankshaft centre to minimize the risk of pipe breakage.
- Inverted dynamic balancing device to achieve high speed stability of equilibrium.
- Electric die height adjustment equipped with digital die height indicator and hydraulic slide locking device to ensure product accuracy.
- MCU control system display press angle, tachogram, fault signal and others information.

CHD-60L

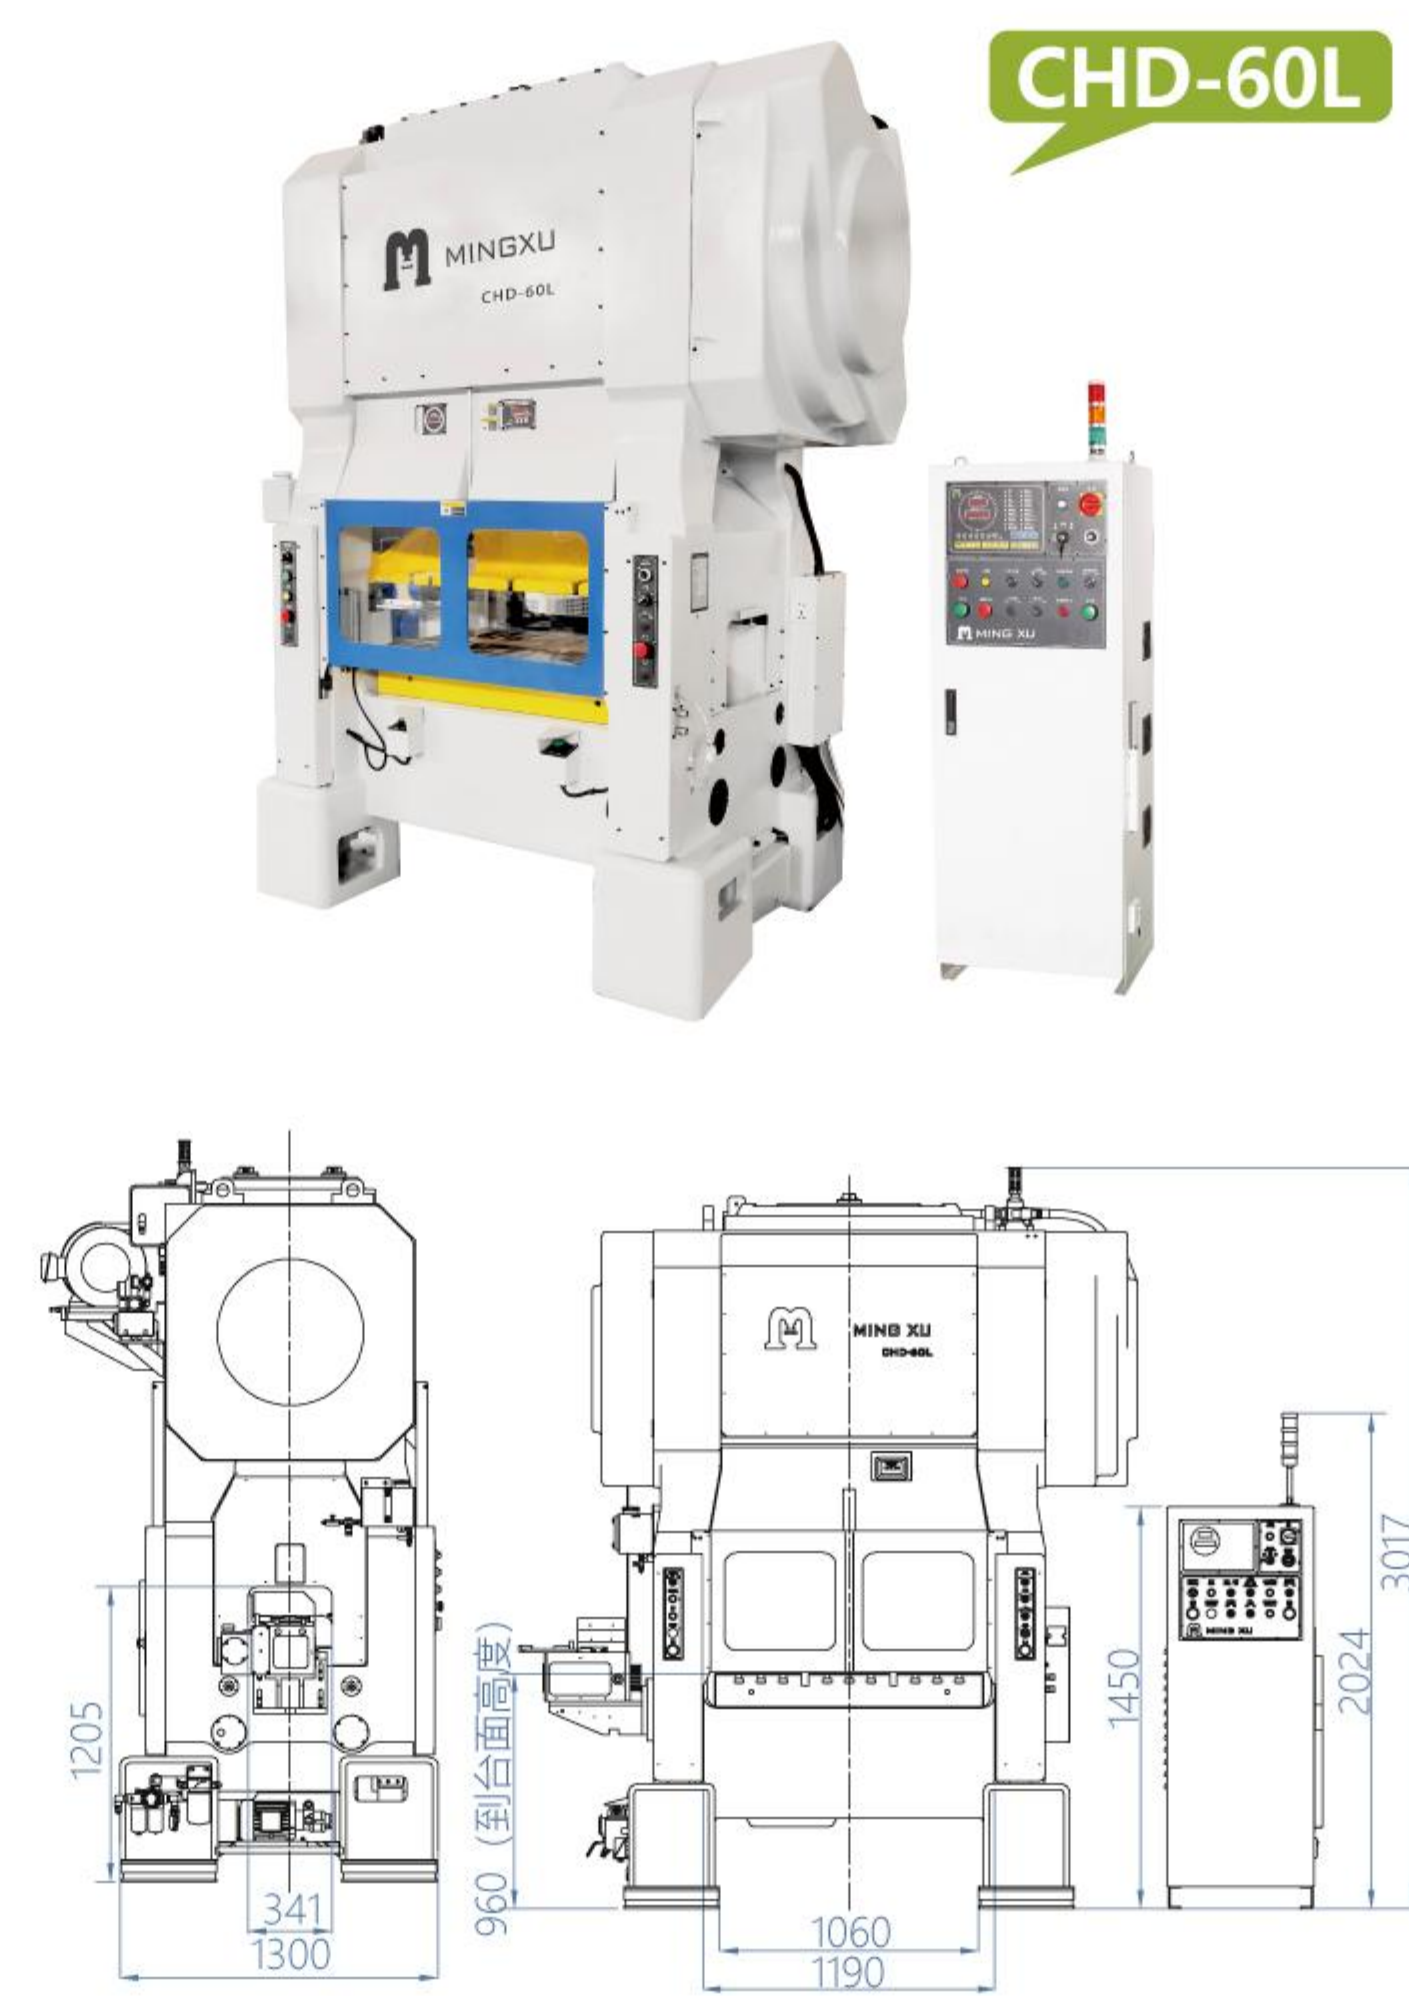

Technical Parameters

Model		CHD-60L			
Capacity	Ton	60			
Stroke	mm	20	30	40	50
Speed	S.P.M	200-650	200-550	200-450	200-400
Die-Height	mm	235-285	230-280	225-275	220-270
Bolster Area	mm	1100*650*150			
Slide Area	mm	1080*500			
Slide Adjustment	mm	50			
Bed Opening	mm	(1000)900*110			
Main Motor	HP/kW	20/15-4P			
Gross Weight (approx.)	Ton	12.5			
Lubrication		Automatic Lubrication			
Speed Control		Inverter			
Clutch & Brake		Pneumatic Dry			
Auto Top Stop		T.D.C(Movable Control Panel)			
Shock Absorber		Damper/Spring Damper			

Standard Accessories

Accessories	Standard
Inverter	●
Die height Indicator	●
Electric die height adjustment	●
Die height accuracy 0.01mm	●
Micro inching positioning	●
Dynamic balancer	●
Hydraulic slide locking device	●
Electric control box	●
Circulation lubrication device	●
Clutch & Brake	●
Oil cooler	●
Electronic rotary cam switch	●

Accessories	Standard
Safety door (front & back sound insulation)	●
Shock absorber	●
Main motor FWD. REV. changeover device	●
Misfeed detector	●
Electric stroke counter	●
Air Ejector	●
Power socket	●
Air source connector	●
Work light	●
Tool box	●
Operation manual	●